


SW21C – 2x1 C Band Switch

- Praniskom SW21 Series of RF Switches are designed with excellent RF performance.
- SW21 Series is available in following configurations:
 - a. SW21IF – for 70MHz / 140 Mhz
 - b. SW21L – for L Band frequencies – 950MHz to 2150MHz.
 - c. SW21C – for C Band frequencies – DC to 6 GHz
 - d. SW21Ku – for Ku Band frequencies – DC to 18 GHz
- SW21 Series Switches have excellent advantage of space saving 1 RU rack mount design.
- Front panel of Unit is equipped with MIMIC diagram showing signal flow by illumination of LEDs.
- Controllable via front panel push button switch or remotely via RS232 interface
- Dual Redundant power supplies.
- Dual color illuminated LEDs for individual health monitoring up to four equipments
- Custom labelling for varieties of equipments like encoder, modulator, upconverter, downconverters, decoder, HPAs., etc and programmable control logic.

SALIENT FEATURES

- Excellent RF performance
- Broadband frequency range of DC to 7 GHz
- 2:1 Switch
- Dual Power Supplies
- Local / Remote control
- Automatic / Manual switching
- High Isolation
- 21 dB Return loss

For more information on any of our products or services please visit us on the Web at:
www.praniskom.com

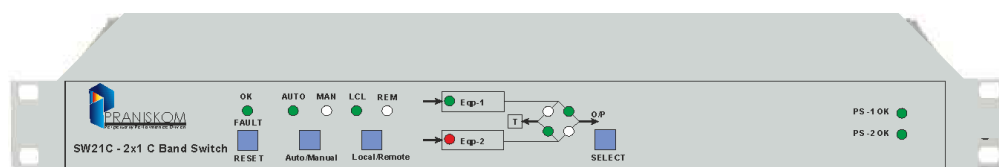

FRONT PANEL



REAR PANEL

Technical Specifications

Frequency	: DC to 7000 MHz
Range	
Inputs	: 2 Nos (SMA 50 Ohms)
Outputs:	: 1 No (SMA 50 Ohms)
Switching Mode	: Automatic / Manual Switching based on fault NC inputs from Upconverters.
Termination	: External termination with 50 Ohms for unused input.
Return Loss	: 21dB @6GHz
Insertion Loss	: < 0.5 dB Max
Isolation	: 90 dB Typical (70dB Minimum)
Status Indication	: LED indication of health status of equipment
Switches	: Push button switches for Manual selection of switches
Power supply	: 230 V +/- 20% (Dual Power Supply)
Operating Temperature	: 0 to 50 Deg C.
Operating Humidity	: 90% non-condensing